

# PRODUCT CATALOGUE

## DIFFERENTIAL PRESSURE TRANSMITTER





# PRESSURE AT THE HIGHEST LEVEL

“Successful medium-sized companies are not successful because they are active in many areas, but rather because they concentrate on one area and do it better than anyone else.”

This is our philosophy. That’s why BD|SENSORS has concentrated on electronic pressure measurement technology from the beginning.

With our unremitting product and quality strategy we have been successful in becoming a major player on the world market for electronic pressure sensing devices within a few years.

With 260 employees at 4 locations in Germany, the Czech Republic, Russia and China BD|SENSORS has solutions from 0.1 mbar to 8000 bar:

- > pressure sensors, pressure transducers  
pressure transmitters

---

- > electronic pressure switches

---

- > pressure measuring devices with display and  
switching outputs

---

- > hydrostatic level probes

---

Two pressure transmitters and a submersible probe, based on a stainless steel silicon sensor were the beginning. Today the range extends to more than 100 standard products, from economical OEM devices to high-end products with HART® communication or field bus interface.

In addition we have developed hundreds of customer-specific applications, underlining the competence and flexibility of BD|SENSORS. The excellent price/performance ratio of our products is proof of the fact that we are able to meet the toughest demand: Being a problem-solver for our customers.

For large production batches as well as for small production numbers, no matter for what medium or external factors, with almost any mechanical or electrical connection - we solve your problem

**flexibly, quickly and cost-efficiently.**

## INDEX

PRECISION	4-17
DPT 200	4-8
XMD	9-13
DPT 100	14-17
INDUSTRY	18-35
PLANT AND MACHINE ENGINEERING	
DMD 331	18-21
DMD 831	22-24
DMD 341	25-28
HVAC	
DPS 300	29-32
DPS 200	33-35
4 ADVANTAGES	38



# DPT 200

## Differential Pressure Transmitter for Process Industry with HART®-Communication

accuracy according to IEC 60770:  
0.075 % FSO

### Differential pressure

from 1 mbar up to 20 bar

### Static pressure

max. 400 bar

### Output signal

2-wire: 4 ... 20 mA

### Special characteristics

- ▶ static over pressure 400 bar
- ▶ rangeability max. 100:1
- ▶ aluminium die cast case
- ▶ HART®-communication
- ▶ output signal: linear or square root extraction






### Optional versions

- ▶ Ex-version group I
  - Ex ia = intrinsically safe version for firedamp mines
- ▶ Ex-version group II
  - Ex ia = intrinsically safe version
  - Ex d = flameproof enclosure
- ▶ LC display
- ▶ stainless steel housing

The differential pressure transmitter DPT 200 has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

The possibility passes different pressure seals at the DPT 200 adding with different membrane materials to reach an optimal adaptation to the application.

### Preferred areas of use are

-  Oil and gas industry
-  Chemical and petrochemical industry
-  Energy industry
-  Food and beverage
-  Paper industry




Differential pressure ranges					
Sensor type	A	B	C	D	E
Differential pressure range dp	10 mbar	60 mbar	400 mbar	2.5 bar	20 bar
Setting limits (offset and span in this range freely adjustable)	-10 ... 10 mbar	-60 ... 60 mbar	-400 ... 400 mbar	-2.5 ... 2.5 bar	-20 ... 20 bar
Lowest permissible span	1 mbar	2 mbar	4 mbar	25 mbar	200 mbar
Permissible static pressure	70 bar	160 bar	160 bar	160 bar	160 bar
optional	-	-	400 bar	400 bar	400 bar
Rangeability TD (with respect to the differential pressure range dp)	10:1	30:1	100:1	100:1	100:1
Output signal / Supply					
Standard	2-wire: 4 ... 20 mA with HART® communication / $V_S = 12 \dots 42 V_{DC}$ with optional display: $V_S = 15 \dots 42 V_{DC}$				
Option IS-protection	2-wire: 4 ... 20 mA with HART® communication / $V_S = 16.5 \dots 28 V_{DC}$ (with or without display)				
Error signal	Namur NE43	high / low (adjustable)			
Performance					
Accuracy	turn-down $\leq 10:1$ : $\leq \pm 0.075$ % FSO turn-down $> 10:1$ : $\leq \pm [0.0075 \times \text{turn-down}]$ % FSO with turn-down = nominal pressure range / adjusted range (FSO = Full Scale Output)				
Influence supply	$\leq 0.001$ % FSO / 10 V				
Influence static pressure	type A: $\pm [0.015 \text{ mbar} + 0.1 \text{ \% of the adjusted range}] / 40 \text{ bar}$ type B: $\pm [0.06 \text{ mbar} + 0.075 \text{ \% of the adjusted range}] / 160 \text{ bar}$ type C: $\pm [0.2 \text{ mbar} + 0.05 \text{ \% of the adjusted range}] / 160 \text{ bar}$ type D: $\pm [1.25 \text{ mbar} + 0.05 \text{ \% of the adjusted range}] / 160 \text{ bar}$ type E: $\pm [10 \text{ mbar} + 0.05 \text{ \% of the adjusted range}] / 160 \text{ bar}$				
Influence installation position	max. 400 Pa (can be compensated by zero-point correction)				
Long term stability	type A: $\leq \pm (0.5 \text{ \%} \times \text{differential pressure range dp}) / \text{year}$ at reference conditions type B: $\leq \pm (0.2 \text{ \%} \times \text{differential pressure range dp}) / \text{year}$ at reference conditions type C - E: $\leq \pm (0.1 \text{ \%} \times \text{differential pressure range dp}) / \text{year}$ at reference conditions				
Permissible load	without LC-display: $R_{\max} = [(V_S - 12 \text{ V}) / 0.023 \text{ A}] \Omega$ with LC-display: $R_{\max} = [(V_S - 15 \text{ V}) / 0.023 \text{ A}] \Omega$ HART®-communication: $R = 230 \Omega \dots 600 \Omega$				
Response time	type A: approx. 1.6 sec type B: approx. 0.4 sec type C: approx. 0.2 sec type D: approx. 0.2 sec type E: approx. 0.1 sec				
Damping	electronic: 0.1 ... 60 sec plus response time				
Thermal effects (Offset and Span)					
Temperature range -20 ... +65°C	type A: $\pm [0.45 \times \text{turn-down} + 0.25]$ % of the adjusted range type B: $\pm [0.30 \times \text{turn-down} + 0.20]$ % of the adjusted range type C - E: $\pm [0.20 \times \text{turn-down} + 0.10]$ % of the adjusted range				
Temperature range -40 ... -20°C and +65 ... +100°C	type A: $\pm [0.45 \times \text{turn-down} + 0.25]$ % of the adjusted range type B: $\pm [0.30 \times \text{turn-down} + 0.20]$ % of the adjusted range type C - E: $\pm [0.20 \times \text{turn-down} + 0.10]$ % of the adjusted range				
Permissible temperatures					
Environment / storage	without display: -40 ... 85 °C with display: -20 ... 65 °C (85°C without function)				
Media wetted parts	silicone oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.) fluorolube oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.)				
Electrical protection					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Mechanical stability					
One-sided overload	according to the maximum static pressure of differential pressure sensor				
Vibration	5 g RMS (25 ... 2000 Hz)		according to DIN EN 60068-2-6		
Shock	100 g / 1 msec		according to DIN EN 60068-2-27		

Materials		
Pressure port / flange	standard option	stainless steel 304 / 1.4301 stainless steel 316 / 1.4401 others on request
Diaphragm	standard option	stainless steel 316L / 1.4435 Hastelloy® C-276 others on request
Vent and dump valves, blanking plugs	standard option	stainless steel 304 / 1.4301 stainless steel 316 / 1.4401
Bolts and nuts	standard option	stainless steel 304 / 1.4301 stainless steel 316 / 1.4401 others on request
Type plate		stainless steel 316 / 1.4401
Housing	standard option	aluminium die cast with epoxy painting (blue) stainless steel 304 / 1.4301 others on request
Seals (media wetted)	standard options	FKM (-30 ... 250 °C) EPDM (-40...125 °C) NBR (-40 ... 125 °C) PTFE (-180...250 °C) others on request
Filling fluids	standard option (on request)	silicone oil (-40...125 °C) fluorolube oil (-40...125 °C) others on request
Explosion protection – aluminium die cast housing		
Approval AX18-DPT200 intrinsically safe version		IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group II: II 1/2G Ex ia IIC T4 Ga/Gb / II 2D Ex ia IIIC T 85 °C Db safety technical maximum values: P <sub>i</sub> = 660 mW, U <sub>i</sub> = 28 V, I <sub>i</sub> = 93 mA, C <sub>i</sub> = 29.7 nF, L <sub>i</sub> negligible permissible temperatures for environment: -40 ... 60 °C
Approval AX18B-DPT200 flameproof enclosure		IBExU 15 ATEX 1110 X / IECEx IBE 16.0006X group II: II 2G Ex db IIC T6 Gb permissible temperatures for environment: -40 ... 65 °C
Explosion protection – stainless steel housing		
Approval AX18-DPT200 intrinsically safe version		IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group I (mines): I M1 Ex ia I Ma group II: II 1G Ex ia IIC T4 Ga / II 2D Ex ia IIIC T85°C Db safety technical maximum values: P <sub>i</sub> = 660 mW, U <sub>i</sub> = 28 V, I <sub>i</sub> = 93 mA, C <sub>i</sub> = 29.7 nF, L <sub>i</sub> negligible permissible temperatures for environment: -40 ... 60 °C
Miscellaneous		
Display (optionally)		type: LCD, lines: 2, digits: 8, bargraph: 0...100%, rotatability: 90°-steps and / or by turn of the electronic case
Configuration		- offset / span local via 2 buttons - local configuration with an optional display - complete configuration via HART®
Mounting bracket (optionally)		material CF8M or stainless steel 304 / 1.4401 weight 0.45 kg (inclusive bolts and nuts)
Ingress protection		IP 67
Installation position		any
Weight		approx. 3 kg (depending on version)
Current consumption		approx. 23 mA
Operational life		100 million load cycles
CE-conformity		EMC Directive: 2014/30/EU
ATEX Directive		2014/34/EU
Connections		
Electrical connection		terminal clamps in clamping chamber (for cable-Ø max.2.5 mm²)
Process connections	standard option	internal thread 1/4" - 18 NPT / fixing 7/16 UNF internal thread 1/4" - 18 NPT / fixing M10 oval flange 1/2" NPT internal thread adapter M20x1.5 others on request
Wiring diagram		
<p>The diagram illustrates the electrical and communication connections for the DPT 200 transmitter. On the left, a rectangular box represents the transmitter with a diagonal line separating the pressure (P) and current (I) ports. Two wires, labeled 'supply +' and 'supply -', enter the transmitter. These wires pass through an ammeter (A) and a switch (S) before reaching the transmitter. The supply voltage is denoted as V<sub>s</sub>. Below the transmitter, an 'Interface HART' block is connected to the transmitter's communication lines. This interface is further connected to a 'PC' via an 'RS232' cable.</p>		


Pin configuration	
Electrical connection	terminal clamps
Supply + (V <sub>s</sub> +)	+
Supply / Test - (V <sub>s</sub> -)	-
Test +	TEST +
Ground	⏏

**Dimensions (mm / in)**

**DPT 200 with display**

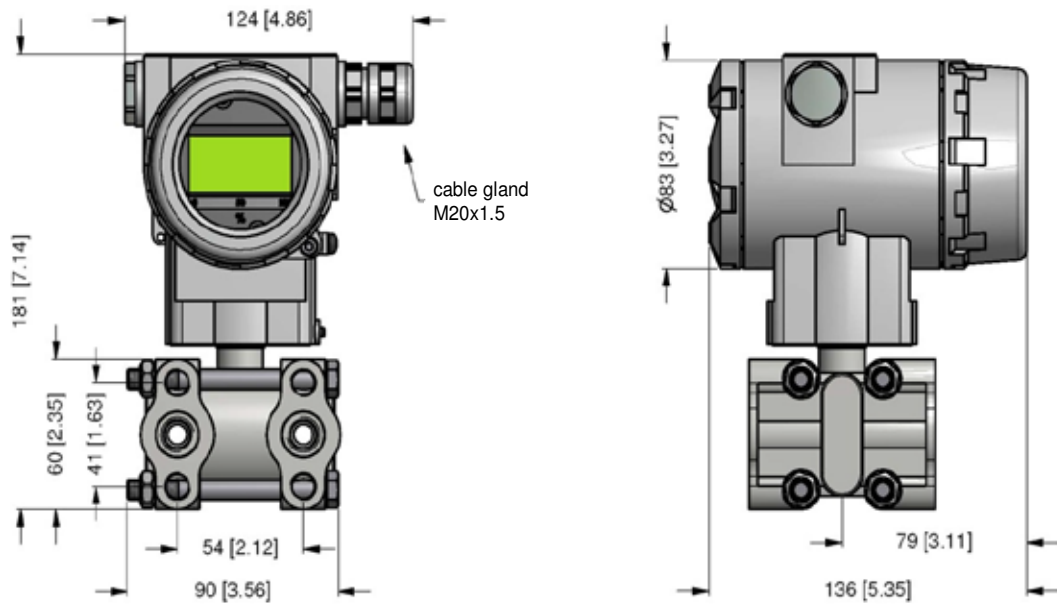

**DPT 200 without display**

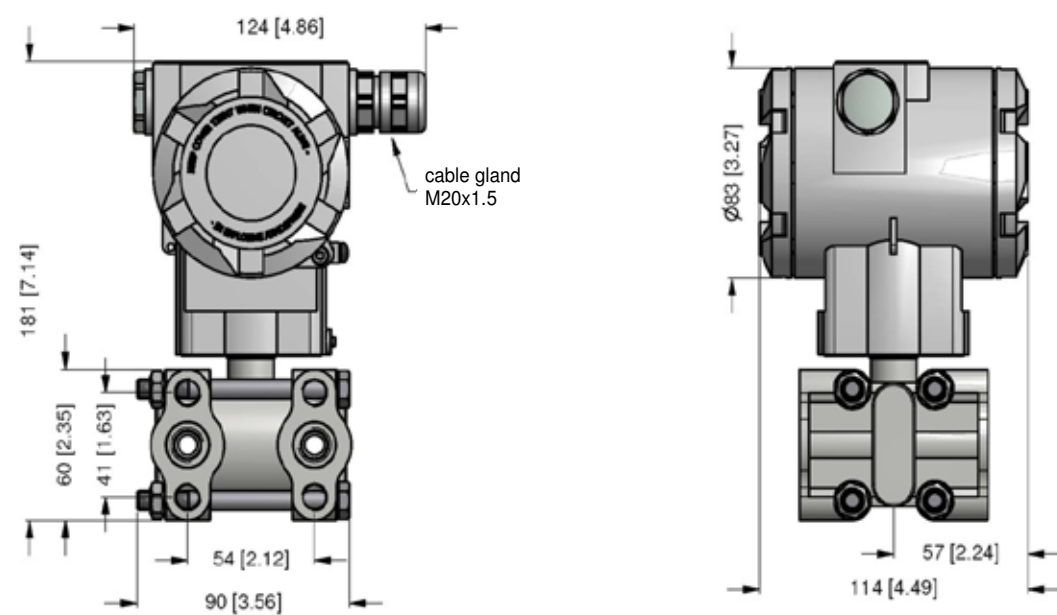

HART® is a registered trade mark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.

Ordering code DPT 200																
DPT 200																
<b>Pressure</b>			differential pressure		3	4	3									
<b>Input</b>			[bar]													
type A:	0 ... 1 mbar up to	0 ... 10 mbar										A				
type B:	0 ... 2 mbar up to	0 ... 60 mbar										B				
type C:	0 ... 4 mbar up to	0 ... 400 mbar										C				
type D:	0 ... 25 mbar up to	0 ... 2.5 bar										D				
type E:	0 ... 200 mbar up to	0 ... 20 bar										E				
			customer										9	consult		
<b>Maximum static pressure</b>			70 bar (only type A)										7			
			160 bar (type B - E)										1			
			400 bar (type C - E)										4			
<b>Output</b>			4 ... 20 mA / 2-wire with HART®-communication									H				
			group II Ex ia 4 ... 20 mA / 2-wire with HART®-communication									I				
			group II Ex d 4 ... 20 mA / 2-wire with HART®-communication <sup>1</sup>									G				
			group I Ex ia 4 ... 20 mA / 2-wire with HART®-communication (mines) <sup>2</sup>									FH				
			customer										9	consult		
<b>Accuracy</b>			0.075 %							1	7					
<b>Housing</b>			aluminium										L			
			stainless steel 1.4301 (304)										2			
<b>Display</b>			without display									A	N			
			with backlight display									A	L			
<b>Electrical connection</b>			terminals / cable gland M20x1.5									A	K	0		
			terminals / cable gland 1/2" NPT									A	K	5	consult	
			customer										9	9	9	consult
<b>Process connection H-side</b>			1/4" - 18 NPT F / fixing 7/16 UNF									N	2	0		
			1/4" - 18 NPT F / fixing M10									N	3	0		
			1/4" - 18 NPT (F / vertical) / fixing 7/16 UNF									N	2	1		
			1/4" - 18 NPT (F / vertical) / fixing M10									N	3	1		
			1/2" NPT F with adapter									N	5	7		
			M20x1.5 F with adapter									N	2	6		
			with volume reduced flange									N	2	5	consult	
			customer										9	9	9	consult
<b>Valve H-side</b>			without									0				
			with vent									1				
			with vent (top)									2				
			with vent (bottom)									3				
<b>Process connection L-side (identical with H side)</b>			1/4" - 18 NPT F / fixing 7/16 UNF									N	2	0		
			1/4" - 18 NPT F / fixing M10									N	3	0		
			1/4" - 18 NPT (F / vertical) / fixing 7/16 UNF									N	2	1		
			1/4" - 18 NPT (F / vertical) / fixing M10									N	3	1		
			1/2" NPT F with adapter									N	5	7		
			M20x1.5 F with adapter									N	2	6		
			with volume reduced flange									N	2	5	consult	
			customer										9	9	9	consult
<b>Valve L-side (identical with H side)</b>			without									0				
			with valve (straight)									1				
			with valve (top)									2				
			with valve (bottom)									3				
<b>Material flange, valves, screws, ...</b>			stainless steel 1.4301 (304)									0	2			
			stainless steel 1.4401 (316)									1	2			
<b>Diaphragm / filling fluid</b>			stainless steel 1.4435 (316L) / silicone oil									1	1			
			Hastelloy® C-276 (2.4819) / silicone oil									H	1			
			customer										9	9	consult	
<b>Seals</b>			FKM									1				
			EPDM									3				
			NBR									5				
			PTFE									4				
			customer										9	consult		
<b>Special version</b>			standard									0	0	0		
			square root function (flow)									5	8	0		
			customer										9	9	9	consult

<sup>1</sup> only in combination with aluminium housing<sup>2</sup> only in combination with stainless steel housing

HART® is a registered trade mark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.





# XMD

## Differential Pressure Transmitter for Process Industry with HART®-Communication and SIL2 (optionally)

accuracy according to IEC 60770:  
0.1 % FSO

### Nominal pressure

from 75 mbar up to 20 bar

### Output signals

2-wire: 4 ... 20 mA  
others on request

### Special characteristics

- ▶ static over pressure 130 bar
- ▶ turn-down 1:10
- ▶ two chamber aluminium die cast case
- ▶ HART®-communication
- ▶ output signal: linear or square root extraction
- ▶ explosion protection intrinsic safety (ia)






### Optional versions

- ▶ explosion protection flameproof equipment (d)
- ▶ SIL2 - version according to IEC 61508 / IEC 61511
- ▶ with integrated display and operating module

The differential pressure transmitter XMD has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

Another attribute is the possibility to switch the output signal from linear to square root extraction by what the flow rate of the medium can be issued.

### Preferred areas of use are

-  Oil and gas industry
-  Chemical and petrochemical industry
-  Energy industry
-  Food and beverage
-  Paper industry




<b>Pressure ranges</b>					
Nominal pressure [bar]	0.075	0.4	2	7	20
Permissible static pressure [bar]	130	130	130	130	130
<b>Output signal / Supply</b>					
2-wire: 4 ... 20 mA with explosion protection	standard: intrinsic safety (ia) with HART®-communication			$V_S = 12 \dots 28 V_{DC}$	
	options: flameproof equipment (d) with HART®-communication			$V_S = 13 \dots 28 V_{DC}$	
	SIL2 / intrinsic safety (ia) with HART®-communication			$V_S = 12 \dots 28 V_{DC}$	
	SIL2 / flameproof equipment (d) with HART®-communication			$V_S = 13 \dots 28 V_{DC}$	
<b>Performance</b>					
Clocking error	$\leq \pm 0.2 \% \text{ FSO}$				
Accuracy <sup>1</sup>	turn-down $\leq 5:1$ : $\leq \pm 0.1 \% \text{ FSO}$ turn-down $> 5:1$ : $\leq \pm [0.1 + 0.015 \times \text{turn-down}] \% \text{ FSO}$ with turn-down = nominal pressure range / adjusted range				
Permissible load	load during HART®-communication: $R_{\min} = 250 \Omega$				
Supply	$\leq 0.05 \% \text{ FSO} / 10 \text{ V}$				
Permissible load	$\leq 0.05 \% \text{ FSO} / k\Omega$				
Long term stability	$\leq \pm (0.1 \times \text{turn-down}) \% \text{ FSO} / \text{year}$ at reference conditions				
Response time	300 msec – with electronic damping 0 sec				
Measuring rate	3.5/sec				
Adjustability	electronic damping: 0 ... 100 sec	offset: 0 ... 90 % FSO	turn-down of span: max. 10:1		
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)					
<b>Thermal effects (Offset and Span) / Permissible temperatures</b>					
Thermal error	$\leq \pm (0.1 \times \text{turn-down}) \% \text{ FSO} / 10 \text{ K}$				
in compensated range	standard: -20 ... 80 °C	option for device without display: -40 ... 60 °C			
Permissible temperatures	without display: medium: -40 ... 85 °C	environment: -40 ... 50 °C	storage: -40 ... 80 °C		
	with display: medium: -40 ... 85 °C	environment: -20 ... 50 °C	storage: -30 ... 80 °C		
<b>Electrical protection</b>					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Electromagnetic compatibility	emission and immunity according to EN 61326				
<b>Mechanical stability</b>					
Vibration	5 g RMS (25 ... 2000 Hz)	according to DIN EN 60068-2-6			
Shock	100 g / 1 msec	according to DIN EN 60068-2-27			
<b>Materials</b>					
Pressure port	stainless steel 1.4401 (316)				
Housing	aluminium die cast, powder-coated				
Viewing glass	laminated safety glass				
Seals (media wetted)	FKM / EPDM				
Diaphragm	standard: stainless steel 1.4435 (316 L)	option: Hastelloy® C-276 (2.4819)			
Media wetted parts	pressure port, seals, diaphragm				
Filling fluids	silicone oil				
<b>Explosion protection</b>					
Approvals AX12-XMD AX2-XMD (with SIL2)	<b>intrinsic safety</b>	IBExU 05 ATEX 1106 X	(with SIL2: IBExU 05 ATEX1105 X)		
	zone 0/1: II 1/2G Ex ia IIB T4 Ga/Gb				
	zone 20: II 1D Ex ia IIIC T85 °C Da				
	safety technical maximum values: $U_i = 28 \text{ V}$ , $I_i = 98 \text{ mA}$ , $P_i = 680 \text{ mW}$ , $C_i = 0 \text{ nF}$ , $L_i = 0 \text{ }\mu\text{H}$ , $C_{GND} = 27 \text{ nF}$				
Approvals AX17-XMD AX7-XMD (with SIL2)	<b>flameproof enclosure</b>	IBExU 12 ATEX 1045 X	(with SIL2: IBExU 12 ATEX1073 X)		
	zone 1: II 2G Ex d IIC T5 Gb				
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with $p_{\text{atm}}$ 0.8 bar up to 1.1 bar				
	in zone 1 or higher: intrinsic safety: -40 ... 70 °C / flameproof enclosure: -20 ... 70 °C				
<b>Options</b>					
SIL2-version	according to IEC 61508 / IEC 61511				
Display	LC display, visible range 32.5 x 22.5 mm; 5-digit 7-segment main display, digit height 8 mm, range of indication $\pm 9999$ ; 8-digit 14-segment additional display, digit height 5 mm; 52-segment bargraph; accuracy $0.1\% \pm 1 \text{ digit}$				
<b>Miscellaneous</b>					
Ingress protection	IP 67				
Installation position	any				
Weight	min. 3 500 g				
Current consumption	approx. 21 mA				
Operational life	100 million load cycles				
CE-conformity	EMC Directive: 2014/30/EU				
ATEX Directive	2014/34/EU				

**Connections**

Electrical connection	terminal clamps in clamping chamber with cable gland M20x1.5 (for cable-Ø 5 up to 14 mm)
Process connections	internal thread 1/4" - 18 NPT

**Wiring diagram**


2-wire-system (current) and HART® - communication

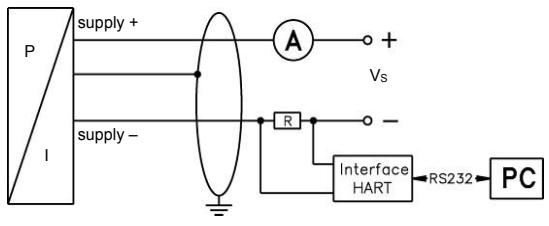

**Pin configuration**

Electrical connection	terminal clamps (clamp section 2.5 mm <sup>2</sup> )
Supply + (Vs+)	+
Supply - (Vs-)	-
Test +	TEST+
COM / Test -	COM/TEST-
COM	COM
Ground	⊥

**Dimensions (in mm)<sup>2</sup>**

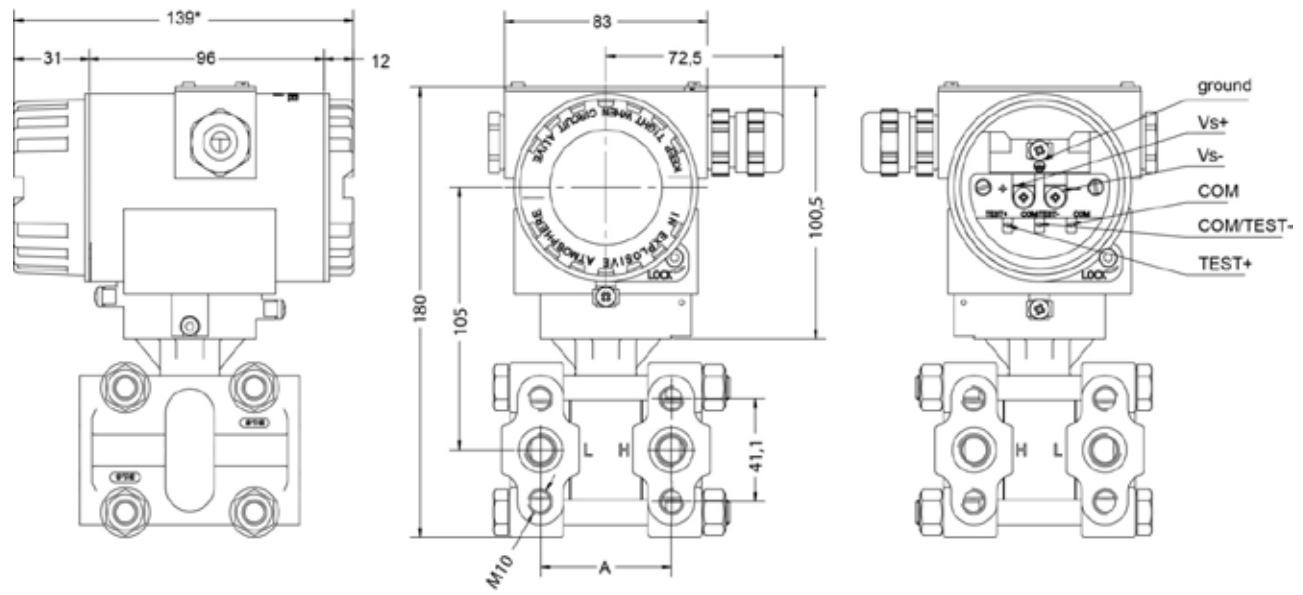

P <sub>N</sub> = 0.075 bar, 0.4 bar, 2 bar	: A = 54.5 ± 0.5 mm
P <sub>N</sub> = 7 bar	: A = 56.0 ± 0.5 mm
P <sub>N</sub> = 20 bar	: A = 56.5 ± 0.5 mm

\* without display and operating module marked dimensions decrease by 19 mm

<sup>2</sup> aluminium die cast case is horizontally rotatable as standard  
 HART® is a registered trade mark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.  
 Windows® is a registered trade mark of Microsoft Corporation

## Pressure Transmitter for Process Industry

**XMP ci****Characteristics**

- ▶ pressure ranges from 0.06 up to 20 bar
- ▶ turn-down 1:10
- ▶ two chamber aluminium die cast case or stainless steel field housing
- ▶ internal or flush mounted capacitive ceramic sensor
- ▶ HART®-communication (standard)
- ▶ explosion protection intrinsic safety (ia)
- ▶ accuracy according to IEC 60770: 0.1 % FSO

**XMP i****Characteristics**

- ▶ pressure ranges for vacuum, gauge and absolute pressure from 0.4 up to 600 bar
- ▶ turn-down 1:10
- ▶ two chamber aluminium die cast case or stainless steel field housing
- ▶ internal or flush welded diaphragm
- ▶ HART®-communication (standard)
- ▶ explosion protection intrinsic safety (ia)
- ▶ accuracy according to IEC 60770: 0.1 % FSO



## Precision Pressure Transmitter for Food Industry, Pharmacy and Biotechnology

**x|act ci****Characteristics**

- ▶ pressure ranges from 0.06 up to 20 bar
- ▶ turn-down 1:10
- ▶ hygienic version
- ▶ flush mounted, capacitive ceramic sensor
- ▶ several process connections (inch thread, Clamp, etc.)
- ▶ with integrated display and operating module
- ▶ accuracy according to IEC 60770: 0.1 % FSO

**x|act i****Characteristics**

- ▶ pressure ranges from 0.4 up to 40 bar
- ▶ turn-down 1:10
- ▶ hygienic version
- ▶ flush welded diaphragm
- ▶ several process connections (G1" cone, Clamp, dairy pipe, etc.)
- ▶ with integrated display and operating module
- ▶ accuracy according to IEC 60770: 0.1 % FSO

**Ordering code XMD**

XMD		□□□	-	□□□□	-	□□	-	□	-	□	-	□□□□	-	□□□□	-	□	-	□	-	1	-	□□□□	
<b>Pressure</b>	differential pressure	3	4	0																			
<b>Input</b>	[bar]																						
	0 ... 0.075	0	7	5	0																		
	0 ... 0.4	4	0	0	0																		
	0 ... 2	2	0	0	1																		
	0 ... 7	7	0	0	1																		
	0 ... 20	2	0	0	2																		
	customer	9	9	9	9																		consult
<b>Design</b>	with display																						
	without display																						
<b>Output</b>	intrinsic safety (ia)																						
	4 ... 20 mA / 2-wire																						
	with HART <sup>®</sup> -communication																						
	flameproof equipment (d)																						
	4 ... 20 mA / 2-wire																						
	with HART <sup>®</sup> -communication																						
<b>SIL2:</b>	intrinsic safety (ia)																						
	4 ... 20 mA / 2-wire																						
	with HART <sup>®</sup> -communication																						
<b>SIL2:</b>	flameproof equipment (d)																						
	4 ... 20 mA / 2-wire																						
	with HART <sup>®</sup> -communication																						
	customer																						consult
<b>Accuracy</b>	0.1 % FSO																						
<b>Electrical connection</b>	terminal clamp																						
	customer																						consult
<b>Mechanical connection</b>	internal thread 1/4" - 18 NPT																						
<b>Diaphragm</b>	stainless steel 1.4435 (316L)																						
	Hastelloy <sup>®</sup> C-276 (2.4819)																						
	customer																						consult
<b>Seal</b>	FKM																						
	EPDM																						
<b>Special version</b>	standard																						
	customer																						consult

HART<sup>®</sup> is a registered trade mark of HART Communication Foundation  
 Hastelloy<sup>®</sup> is a brand name of Haynes International Inc.



# DPT 100

## Differential Pressure Transmitter for Process Industry

accuracy according to IEC 60770:  
0.1 % FSO

### Differential pressure

---

from 10 mbar up to 20 bar

### Static pressure

---

max. 400 bar

### Output signal

---

2-wire: 4 ... 20 mA

RS485 with Modbus RTU protocol

### Special characteristics

---

- ▶ compact design
- ▶ fast response time
- ▶ aluminium die cast case
- ▶ zero adjustment via button

### Optional versions

---

- ▶ several process connections

The differential pressure transmitter DPT 100 has been especially designed for fast test processes in leakage and flow measurement, where a fast response time and high sampling rate are necessary.

The compact design of the DPT 100 facilitates the usage in standardised applications. For instance, the installation in 19" racks.

The DPT 100 with optionally RS485 interface uses the communication protocol Modbus RTU which has found the way in industrial communication as an open protocol. The Modbus protocol is based on a master Slave architecture with which up to 247 Slaves can be questioned by a master – the data will transfer in binary form.

### Preferred areas of use are

---

Test engineering / leak testing



Machine and plant engineering



Environmental technology



Energy production



Modbus®

Differential pressure ranges						
Pressure range $P_N$ diff.	10 mbar	60 mbar	100 mbar	400 mbar	2.5 bar	20 bar
Pressure range $P_N$ symmetric (diff.)	$\pm 10$ mbar	$\pm 60$ mbar	$\pm 100$ mbar	$\pm 400$ mbar	on request	on request
Permissible static pressure	70 bar	400 bar	400 bar	400 bar	400 bar	400 bar

Output signal / Supply	
Standard	2 wire : 4 ... 20 mA / $V_S = 12 \dots 32 V_{DC}$
Option	digital: RS 485 with Modbus RTU protocol / $V_S = 9 \dots 32 V_{DC}$ (delay time: 500 msec)

Performance						
Accuracy <sup>1</sup>	$P_N \geq 60$ mbar: $\leq \pm 0.1$ % FSO $P_N < 60$ mbar: $\leq \pm 0.2$ % FSO					
Permissible load	$R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$					
Influence supply	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k $\Omega$					
Influence static pressure $P_N$ [Pa/100 bar]	10 mbar 18	60 mbar 30	400 mbar 40	2.5 bar 250	20 bar 2000	
Influence installation position	max. 400 Pa (can be compensated by zero-point correction) <b>for ranges &lt; 60 mbar please state installation position on the order</b>					
Long term stability	$P_N \geq 60$ mbar: $\leq \pm 0.05$ %FSO/ year at reference conditions $P_N < 60$ mbar: $\leq \pm 0.15$ %FSO/ year at reference conditions					
Sampling rate	250 Hz					
Turn-on time	approx. 260 msec					
Response time (10 ... 90 %)	10 msec					

<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)	
Thermal error (offset and span)	$\leq \pm 0.1$ % FSO / 10 K
Compensated range	-20 ... 80 °C
Permissible temperatures	medium: -25 ... 85°C    electronics / environment: -25 ... 85°C    storage: -25 ... 85°C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
One-sided overload	according to the maximum static pressure of differential pressure sensor
Vibration	5 g RMS (25 ... 2000 Hz)    according to DIN EN 60068-2-6
Shock	100 g / 1 msec    according to DIN EN 60068-2-27


Materials	
Pressure port / flange	standard: stainless steel 304 / 1.4301 option: stainless steel 316 / 1.4401    others: on request
Diaphragm	stainless steel 316L / 1.4404    others: on request
Vent and dump valves	
Blanking plugs	standard: stainless steel 304 / 1.4301 option: stainless steel 316 / 1.4401
Bolts and nuts	standard: stainless steel 304 / 1.4301 option: stainless steel 316 / 1.4401    others: on request
Housing	aluminium die cast with epoxy painting (grey)    others: on request
Cable gland	polyamide
Seals (media wetted)	standard: FKM option: EPDM, NBR    others: on request
Filling fluids	silicone oil    others: on request
Media wetted parts	pressure port, seal of pressure port, diaphragm

Miscellaneous		
Mounting bracket (optionally)	material C-steel or stainless steel 304 / 1.4401 weight 0.45 kg (incl. bolts and nuts)	
Ingress protection	IP 66 / IP 67	
Installation position	any <sup>2</sup>	
Weight	approx. 1800 g	
Current consumption	approx. 23 mA	
Operational life	100 million load cycles	
CE-conformity	EMC Directive: 2014/30/EU      Pressure Equipment Directive: 2014/68/EU (module A) <sup>3</sup>	
<sup>2</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point. Press the button for zero adjustment (see operating manual).		
<sup>3</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar.		
Connections		
Electrical connection	terminal clamps in clamping chamber (for cable-Ø max.2.5 mm <sup>2</sup> )	
Process connections	Standard option: internal thread 1/4" - 18 NPT / fixing 7/16 UNF internal thread 1/4" - 18 NPT / fixing M10      others: on request	
Wiring diagram		
2-wire-system (current) 	RS485 / Modbus RTU 	
Pin configuration		
Electrical connection	terminal clamps	M12x1 / metal (4-pin)
Supply +	+ Ub	1
Supply -	- Ub	3
for RS485 / Modbus RTU:		
A (+)	A	2
B (-)	B	4
Ground		plug housing
Dimensions (mm / in)		



### Ordering code DPT 100

DPT 100



Pressure		3	4	5															
differential pressure																			
<b>Input</b>																			
	10 mbar	0	1	0	0														
	60 mbar	0	6	0	0														
	100 mbar	1	0	0	0														
	400 mbar	4	0	0	0														
	2.5 bar	2	5	0	1														
	20 bar	2	0	0	2														
	-10 ... 10 mbar	S	0	1	0														
	-60 ... 60 mbar	S	0	6	0														
	-100 ... 100 mbar	S	1	0	0														
	-400 ... 400 mbar	S	4	0	0														
	customer	9	9	9	9														consult
<b>Output</b>																			
	4 ... 20 mA / 2-wire					1													
	RS485 Modbus RTU					L5													
	customer					9													consult
<b>Accuracy</b>																			
	P <sub>N</sub> ≥ 60 mbar:	0.1 % FSO				1													
	P <sub>N</sub> < 60 mbar:	0.2 % FSO				B													
	customer					9													consult
<b>Housing</b>																			
	aluminium					L													
	customer					9													consult
<b>Electrical connection</b>																			
	terminals / cable gland M12x1.5							A	K	2									
	male plug M12x1 (4-pin) / metal							M	1	7									
	customer							9	9	9									consult
<b>Process connection</b>																			
	1/4" - 18 NPT F / fixing 7/16 UNF							N	2	0									
	1/4" - 18 NPT (F / vertical) / fixing 7/16 UNF							N	2	1									
	1/4" - 18 NPT F / fixing M10							N	3	0									
	1/4" - 18 NPT (F / vertical) / fixing M10							N	3	1									
	customer							9	9	9									consult
<b>Valve</b>																			
	without									0									
	with vent									1									
	with vent (top)									2									
	with vent (bottom)									3									
<b>Material flange, valves, screws, ...</b>																			
	stainless steel 1.4301 (304 SS)									0	2								
	stainless steel 1.4401 (316 SS)									1	2								
	customer									9	9								consult
<b>Diaphragm / filling fluid</b>																			
	stainless steel 1.4435 (316L) / silicone oil									1	1								
	customer									9	9								consult
<b>Seal</b>																			
	FKM																		1
	EPDM																		3
	NBR																		5
	PTFE																		4
	customer																		9
<b>Special version</b>																			
	standard																		0 0 0
	customer																		9 9 9
																			consult



# DMD 331

## Differential Pressure Transmitter for Liquids and Gases

Stainless Steel Sensor

accuracy according to IEC 60770:  
0.5 % FSO

### Differential pressure

from 0 ... 20 mbar up to 0 ... 16 bar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

### Special characteristics

- ▶ differential pressure wet / wet
- ▶ permissible static pressure -onesided- up to 30 times of differential pressure range
- ▶ compact design
- ▶ mechanical robust and reliable at dynamic pressures as well as shock and vibration

### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe  
for gases and dust
- ▶ different electrical and mechanical connections
- ▶ customer specific versions

The DMD 331 is a differential pressure transmitter for industrial applications and is based on a piezoresistive stainless steel sensor, which can be pressurized on both sides with fluids or gases compatible with SST 1.4404 (316L) and 1.4435 (316L).

The compact design allows an integration of the DMD 331 in machines and applications with limited space. The DMD 331 calculates the difference between the pressure on the positive and the negative side and converts it into a proportional electrical signal.

### Preferred areas of use are



Plant and machine engineering



Energy industry

### Preferred used for



Water



Input pressure range						
Nominal pressure [bar]	0.2	0.4	1	2.5	6	16
Differential pressure range [bar]						
TD 1 : 1	0 ... 0.2	0 ... 0.4	0 ... 1	0 ... 2.5	0 ... 6	0 ... 16
up to	up to	up to	up to	up to	up to	up to
TD 1 : 10	0 ... 0.02	0 ... 0.04	0 ... 0.1	0 ... 0.25	0 ... 0.6	0 ... 1.6
Permissible static pressure, one-sided [bar]	0.5	1	3	6	20	60

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / $V_S = 12 \dots 36 V_{DC}$
Option IS-version	2-wire: 4 ... 20 mA / $V_S = 14 \dots 28 V_{DC}$
Option 3-wire	3-wire: 0 ... 10 V / $V_S = 14 \dots 36 V_{DC}$

Performance	
Accuracy <sup>1</sup>	<b>for ranges of max. input pressure <math>P_N &gt; 1</math> bar (codes C, D, E)</b> $\leq \pm 0.5$ % FSO (differential pressure range with TD from 1:1 up to 1:5) $\leq \pm 1$ % FSO (differential pressure range with TD > 1:5 up to 1:10) <b>for ranges of max. input pressure <math>P_N \leq 1</math> bar (codes A, B, F)</b> $\leq \pm 0.5$ % FSO (differential pressure range with TD from 100 to 50 % from nominal pressure) $\leq \pm 1$ % FSO (differential pressure range with TD > 50 to 10 % from nominal pressure)
Permissible load	current 2-wire: $R_{max} = [(V_S - V_S \text{ min}) / 0.02 \text{ A}] \Omega$ voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / $\text{k}\Omega$
Long term stability	$\leq \pm 0.2$ % FSO / year at reference conditions
Response time	< 5 msec

<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects <sup>2</sup> (Offset and Span) / Permissible temperatures			
Nominal pressure $P_N$ [bar]	0.2	0.4	$\geq 1.0$
Tolerance band [% FSO]	$\leq \pm 2.5$	$\leq \pm 2$	$\leq \pm 1.5$
TC, average [% FSO / 10 K]	$\pm 0.4$	$\pm 0.3$	$\pm 0.2$
in compensated range [°C]	0 ... 50		0 ... 70
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment: -25 ... 85 °C	storage: -40 ... 100 °C

<sup>2</sup> relating to nominal pressure range

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326






Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec

Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	aluminium, black anodized
Seals (media wetted)	FKM / others on request
Diaphragm	stainless steel 1.4435 (316L)
Media wetted parts	pressure port, seals, diaphragm

Miscellaneous	
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 250 g
Operational life	100 million load cycles
Ingress protection	IP 65
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

Explosion protection (only for 4 ... 20 mA / 2 wire)	
Approvals DX13A-DMD 331	<b>IBExU 08 ATEX 1125 X</b> zone 1: II 2G Ex ia IIC T4 Gb      zone 21: II 2D Ex ia IIIC T85°C Db
Safety technical maximum values	$U_i = 28 V_{DC}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C_i \leq 1 \text{ nF}$ , $L_i \leq 10 \mu\text{H}$ , the supply connections have an inner capacity of max. 27 nF to the housing
Permissible temperatures for environment	-25 ... 65°C

Pin configuration	
Electrical connection	ISO 4400
Supply +	1
Supply -	2
Signal + (only 3-wire)	3
Shield	ground pin

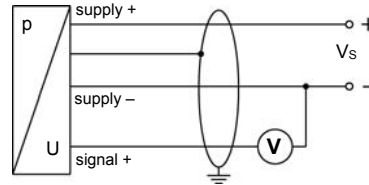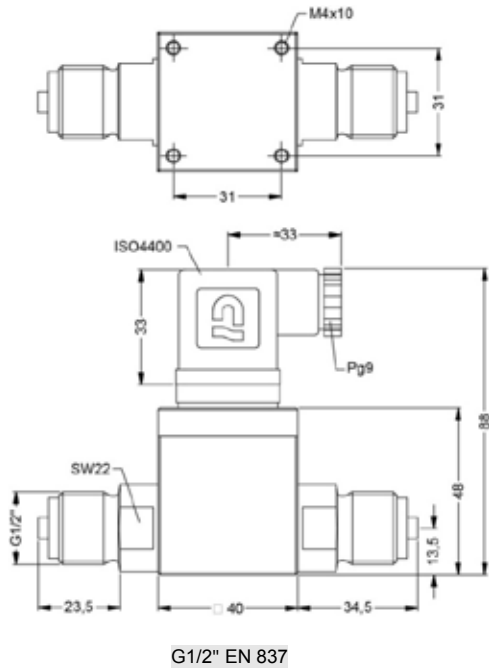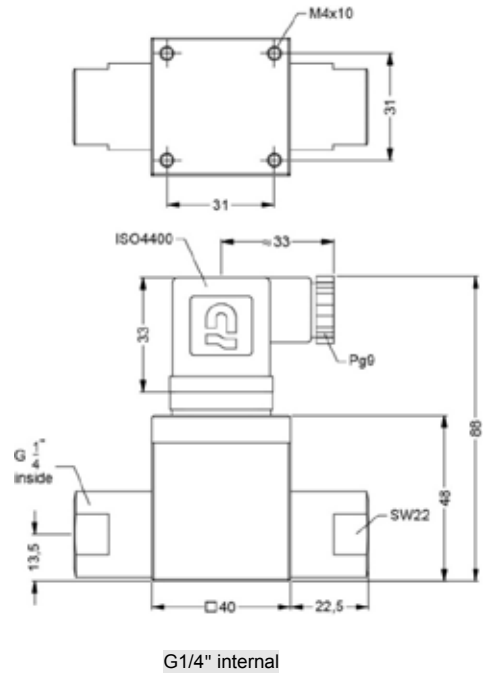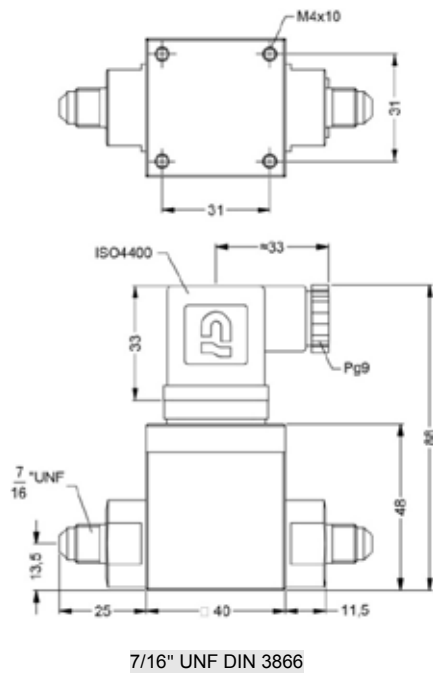**Wiring diagrams****2-wire-system (current)****3-wire-system (voltage)****Mechanical connection (dimensions in mm)****standard****option**

### Ordering code DMD 331

DMD 331



Pressure		differential pressure		7	3	0																			
<b>Nominal pressure range</b>		[bar]																							
	0.2		F																						
	0.4		A																						
	1.0		B																						
	2.5		C																						
	6.0		D																						
	16		E																						
	customer		9											consult											
<b>Differential pressure range</b>		[bar]		F	A	B	C	D	E																
	0.02									0	2	0	0												
	0.04									0	4	0	0												
	0.10									1	0	0	0												
	0.25									2	5	0	0												
	0.40									4	0	0	0												
	0.60									6	0	0	0												
	1.0									1	0	0	1												
	2.5									2	5	0	1												
	4.0									4	0	0	1												
	6.0									6	0	0	1												
	10									1	0	0	2												
	16									1	6	0	2												
	customer									9	9	9	9											consult	
<b>Output</b>																									
	4 ... 20 mA / 2-wire											1													
	intrinsic safety 4 ... 20 mA / 2 wire											E													
	0 ... 10 V / 3-wire											3													
	customer											9											consult		
<b>Accuracy</b>																									
	TD ≤ 1:5	0.5 %											5												
	TD > 1:5 up to 1:10	1.0 %											8												
	customer											9											consult		
<b>Electrical connection</b>																									
	Male and female plug ISO 4400											1	0	0											
	customer											9	9	9											consult
<b>Mechanical connection</b>																									
	G1/2" EN 837											2	0	0											
	7/16" UNF DIN 3866											U	0	0											
	G1/4" internal thread											J	0	0											
	customer											9	9	9											consult
<b>Seals</b>																									
	FKM											1													
	customer											9											consult		
<b>Special version</b>																									
	standard											0	0	0											
	customer											9	9	9											consult



# DMD 831

## Differential Pressure Transmitter with Display and Contact for Fluids and Gases

- ▶ 2 piezoresistive stainless steel sensors
- ▶ differential pressure from 0 ... 1 bar up to 0 ... 70 bar
- ▶ display and pressure port rotatable

### Technical Data



Input pressure range							
Type	D5	D6	D7	D8	DA	DB	H1
Differential pressure range gauge <sup>1</sup> / abs. <sup>2</sup> (calibration) [bar]	0 ... 1	0 ... 2	0 ... 3,5	0 ... 7	0 ... 20	0 ... 35	0 ... 70
Permissible static pressure, one-sided [bar]	1	2	3,5	7	20	35	70
<sup>1</sup> gauge: If the reference point is the ambient atmosphere, the value "0" is displayed with unloaded system.							
<sup>2</sup> abs.: If the reference point is the absolute vacuum, the atmospheric pressure is indicated with unloaded system.							
Analogue signal / Supply							
Standard	3-wire: 4 ... 20 mA			24 V <sub>DC</sub> ± 10 %			
Permissible load	500 Ω						
Accuracy <sup>3</sup>	≤ ± 1 % BFSL						
<sup>3</sup> accuracy according to IEC 60770 – (non-linearity, hysteresis, repeatability)							
Contact							
Number, type	standard: 1 PNP			option: 2 independent PNP			
Max. switching current	125 mA, short-circuit proof						
Switching accuracy <sup>3</sup>	≤ ± 0.5 % FSO						
Repeatability	≤ ± 0.1 % FSO						
Switching cycles	> 100 x 10 <sup>6</sup>						
Delay time	0 ... 100 sec						
Programming							
Adjustability	analogue output / contact refers to: - pressure (+ port) / - pressure (- port) / - differential pressure turn-down: max. 1:10						
Thermal error <sup>4</sup> (offset and span) / Permissible temperatures							
Tolerance band	≤ ± 1.5 % FSO						
TC, average	± 0.2 % FSO / 10 K						
In compensated range	0 ... 70 °C						
Permissible temperatures	medium: -40 ... 125 °C		electronics / environment: -25 ... 85 °C			storage: -40 ... 85 °C	
<sup>4</sup> relating to nominal pressure range							
Electrical protection							
Short-circuit protection	permanent						
Reverse polarity protection	no damage, but also no function						
Electromagnetic compatibility	emission and immunity according to EN 61326						

<b>Mechanical stability</b>		
Vibration	10 g RMS (20 ... 2000 Hz)	according to DIN EN 60068-2-6
Shock	100 g / 11 msec	according to DIN EN 60068-2-27
<b>Materials</b>		
Pressure port	stainless steel 1.4404 (316L)	
Housing	PA 6.6, Polycarbonate	
Seals (media wetted)	FKM	others on request
Diaphragm	stainless steel 1.4435 (316L)	
Media wetted parts	pressure port, seals, diaphragm	
<b>Miscellaneous</b>		
Display	4-digit, red LED-display, digit size 7 mm range of indication -1999 ... +9999; accuracy 0.1 % +/- 1 digit; digital damping 0.3 ... 30 sec (programmable);	
Current consumption	signal output current: max. 60 mA (without switching current)	
Weight	approx. 350 g	
Operational life	100 million load cycles	
Ingress protection	IP 65	
<b>Electrical connections</b>		
Standard	connector M12x1 / 5- pin (IP 67)	others on request
<b>Wiring diagram</b>		
<b>Pin configuration</b>		
Electrical connections	M12x1 (5-pin), plastic	cable colour (IEC 60757) (IP 67)
Supply +	1	wh (white)
Supply -	3	bn (brown)
Signal +	2	gn (green)
Contact 1	4	gy (grey)
Contact 2	5	pk (pink)
Shield	via pressure port	gnye (green-yellow)
<b>Mechanical connections (in mm)</b>		<b>Electrical connections (dimensions in mm)</b>
<b>standard</b>		
<p>M12x1</p> <p>P+</p> <p>P-</p> <p>mounting bracket included in the delivery</p> <p>G1/2" DIN 3852</p>		<p>32</p> <p>10</p> <p>10</p> <p>30</p> <p>10</p> <p>10</p> <p>M12x1 (5-pin)</p> <p>cable outlet</p> <p>cable outlet PVC Ø = 4.9mm cable outlet PUR Ø = 5.7mm</p>
<b>option</b>		
<p>15</p> <p>2</p> <p>1</p> <p>G 1/4" EN 837</p> <p>14</p> <p>1/4" NPT</p> <p>14</p> <p>12</p> <p>G 1/4" DIN 3852</p> <p>23</p> <p>3</p> <p>G 1/2" EN 837</p>		
<p>G1/4" EN 837</p> <p>1/4" NPT</p> <p>G1/4" DIN 3852</p> <p>G1/2" EN 837</p>		

## Ordering code DMD 831

DMD 831

□□□□ - □□□□ - □□□□ - □□□□ - □□□□ - □□□□

Pressure										
differential pressure gauge	7	3	2							
differential pressure abs.	7	3	3							
max. static pressure [bar]										
1				D	5					
2				D	6					
3.5				D	7					
7				D	8					
20				D	A					
35				D	B					
70				H	1					
customer				9	9					consult
differential pressure range [bar]										
Minimum	Maximum	D5	D6	D7	D8	DA	DB	H1		
0.1	1	1	0	0	1					
0.2	2	2	0	0	1					
0.35	3.5	3	5	0	1					
0.7	7	7	0	0	1					
2	20	2	0	0	2					
3.5	35	3	5	0	2					
7	70	7	0	0	2					
customer		9	9	9	9					consult
Analogue output										
4 ... 20 mA / 3-wire									7	
customer									9	consult
Contact										
1 contact PNP									1	
2 contacts PNP									2	
customer									9	consult
Accuracy										
1% FSO BFSL									G	
customer									9	consult
Electrical connection										
M12x1 (5-pin)									N	0 1
Cable outlet with PVC cable <sup>1</sup>									T	A 0
customer									9	9 9
										consult
Mechanical connection										
G 1/2" DIN 3852									1	0 0
G 1/2" EN 837									2	0 0
G 1/4" DIN 3852									3	0 0
G 1/4" EN 837									4	0 0
1/2" NPT									N	0 0
1/4" NPT									N	4 0
customer									9	9 9
										consult
Seals										
FKM									1	
customer									9	
										consult
Special version										
standard									0	0 0
customer									9	9 9
										consult

<sup>1</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)





# DMD 341

## Differential Pressure Transmitter for Gases and Compressed Air in Compact Version

Silicon Sensor

accuracy according to IEC 60770:  
0.35 % / 1% / 2%

### Differential pressure

from 0 ... 6 mbar up to 0 ... 1000 mbar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

### Special characteristics

- ▶ aluminium housing
- ▶ suited for non-aggressive gases and compressed air



### Optional versions

- ▶ customer specific versions


The DMD 341 is a differential pressure transmitter for non-aggressive gases and compressed air. Because of its compact and robust aluminium housing it is particularly suited for machine and plant engineering.

Basic element of the DMD 341 is a piezo-resistive silicon sensor, which features high accuracy and excellent long term stability.

### Preferred areas of use are

-  Plant and machine engineering
-  Heating and air conditioning

### Preferred used for

-  Compressed air, non-aggressive gases



Input pressure range											
Nominal pressure $P_N$ (over, differential pressure) [mbar]	0...6	0...10	0...20	0...40	0...60	0...100	0...160	0...250	0...400	0...600	0...1000
Nominal pressure $P_N$ symmetric (differential pressure) [mbar]	± 6	± 10	± 20	± 40	± 60	± 100	± 160	± 250	± 400	± 600	± 1000
Overpressure [mbar]	100	100	200	350	350	1000	1000	1000	1000	3000	3000

Output signal / Supply	
Standard	standard pressure range: 2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$
Options 3-wire	standard pressure range: 3-wire: 0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$ 0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$

Performance	
Accuracy <sup>1</sup>	$P_N > 160$ mbar: $\leq \pm 0.35$ % FSO $40$ mbar $\leq P_N \leq 160$ mbar: $\leq \pm 1$ % FSO $P_N < 40$ mbar: $\leq \pm 2$ % FSO
Permissible load	current 2-wire: $R_{max} = [(V_S - V_{S \min}) / 0.02 A] \Omega$ current 3-wire: $R_{max} = 240 \Omega$ voltage 3-wire: $R_{min} = 10 k\Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k $\Omega$
Long term stability	$\leq \pm 0.2$ % FSO / year at reference conditions
Response time	< 5 msec

<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span) / Permissible temperatures				
Nominal pressure $P_N$ [mbar]	$\leq 10$	$\leq 20$	$\leq 250$	$> 250$
Tolerance band [% FSO]	$\leq \pm 2$	$\leq \pm 1.5$	$\leq \pm 1$	$\leq \pm 0.5$
TC, average [% FSO / 10 K]	$\pm 0.3$	$\pm 0.25$	$\pm 0.15$	$\pm 0.08$
in compensated range	0 ... 60 °C			
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment: -25 ... 85 °C	storage: -40 ... 100 °C	

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec


Materials	
Pressure port	G1/8" internal: aluminium, silver anodized flexible tube connection $\varnothing 6.6 \times 11$ : brass, nickel plated
Housing	aluminium, silver anodised
Seal (media wetted)	PUR, bonded
Sensor	silicon, glass, RTV, ceramics $Al_2O_3$ , nickel
Media wetted parts	pressure port, housing, seal, sensor

Miscellaneous	
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu H/m$
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 250 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU


Pin configuration			
Electrical connection	ISO 4400	M12x1 (4-pin), metal	cable colour (IEC 60757)
Supply +	1	1	wh (white)
Supply -	2	2	bn (brown)
Signal + (only 3-wire)	3	3	gn (green)
Shield	ground pin	4	gnye (green-yellow)

### Wiring diagrams

#### 2-wire-system (current)




#### 3-wire-system (current / voltage)

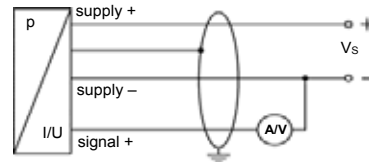


### Electrical connections (dimensions in mm)

#### standard




ISO 4400 (IP 65)

#### option



M12x1 4-pin (IP 67)


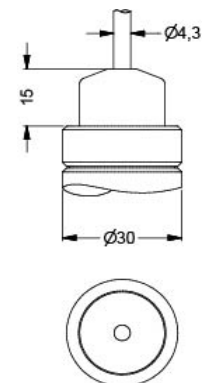


cable outlet with PVC-cable (IP 67)<sup>2</sup>

<sup>2</sup> standard: 2 m PVC cable (without ventilation tube), optionally cable with ventilation tube

### Mechanical connection (dimensions in mm)

#### standard

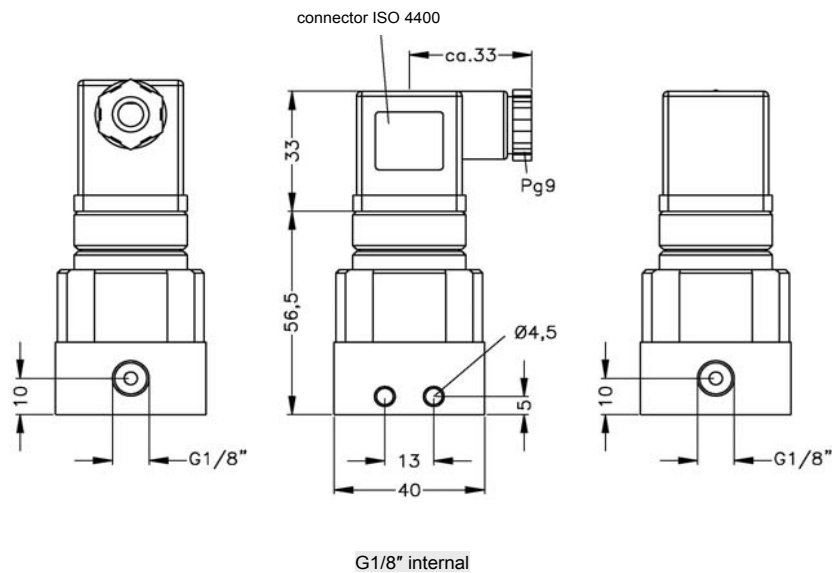

## Ordering code DMD 341

DMD 341

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Pressure																					
differential pressure		3	3	0																	
gauge pressure		3	3	1																	
Input																					
[mbar]																					
6		0	0	6	0																
10		0	1	0	0																
20		0	2	0	0																
40		0	4	0	0																
60		0	6	0	0																
100		1	0	0	0																
160		1	6	0	0																
250		2	5	0	0																
400		4	0	0	0																
600		6	0	0	0																
1000		1	0	0	1																
-6 ... 6		S	0	0	6															consult	
-10 ... 10		S	0	1	0																consult
-20 ... 20		S	0	2	0																consult
-40 ... 40		S	0	4	0																consult
-60 ... 60		S	0	6	0																consult
-100 ... 100		S	1	0	0																consult
-160 ... 160		S	1	6	0																consult
-250 ... 250		S	2	5	0																consult
-400 ... 400		S	4	0	0																consult
-600 ... 600		S	6	0	0																consult
-1000 ... 1000		S	1	0	2																consult
customer		9	9	9	9																consult
Output																					
4 ... 20 mA / 2-wire										1											
0 ... 20 mA / 3-wire										2											
0 ... 10 V / 3-wire										3											
customer										9											consult
Accuracy																					
standard for $P_N > 160$ mbar		0,35	%	FSO						3											
standard for $40 \text{ mbar} \leq P_N \leq 160$ mbar		1,0	%	FSO						8											
standard for $P_N < 40$ mbar		2,0	%	FSO						G											
customer										9											consult
Electrical connection																					
male and female plug ISO 4400										1	0	0									
male plug M12x1 (4-pin), metal										M	1	0									
cable outlet with PVC cable <sup>1</sup>										T	A	0									
customer										9	9	9									consult
Mechanical connection																					
G1/8" internal thread													Q	0	0						
Ø 6.6 x 11 (for flex. tubes Ø 6)													Y	0	0						
customer													9	9	9						consult
Seals																					
PUR, bonded																	6				
Special version																					
standard																			0	0	0
customer																			9	9	9

<sup>1</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)



# DPS 300

## Multi Range Differential Pressure Transmitter for Gas and Compressed Air

Silicon Sensor

accuracy according to IEC 60770:  
0.5% FSO BFSL

### Differential pressure

from 0 ... 1.6 mbar up to 0 ... 1000 mbar

### Output signals

3-wire: 0 ... 10 V, 0 ... 20 mA  
(0 ... 5 V, 4 ... 20 mA switchable)

2-wire: 4 ... 20 mA (optional)

### Special characteristics

- ▶ adjustable ranges
- ▶ high overpressure capability
- ▶ adjustable damping
- ▶ compact form

### Optional versions

- ▶ LC-display, two-line
- ▶ automatic zero adjustment
- ▶ contacts  
(only in combination with display)
- ▶ square root extraction  
(only in combination with display)

The pressure transmitter DPS 300 was developed for the differential pressure measuring for dry, non aggressive gases and compressed air and can be used for several HVAC applications

The DPS 300 is a multi range transmitter with up to three adjustable ranges.

The device is equipped with a two-line LC display optionally and can be parameterized simply. Values, status of the contact and the unit are shown on the display.

### Preferred applications are



HAVC applications  
e.g. air conditioning, clean room  
technology, filter monitoring



Medical

### Preferred areas of use are



Gas, compressed air



Input pressure range						
Nominal pressure $P_N$ [mbar] (differential, gauge pressure)	1.6	4	10	40	250	1000
Adjustable to [mbar]	1.0	2.5	6	25	60 / 160	400 / 600
Nominal pressure $P_N$ symmetric (differential pressure) [mbar]	$\pm 1.6$	$\pm 4$	$\pm 10$	$\pm 40$	$\pm 250$	$\pm 1000$
Max. static pressure [mbar]	200	200	200	345	1000	3000
Output signal / Supply						
Standard	3-wire:	switchable on: 0 ... 10 V / 0 ... 20 mA 0 ... 5 V / 4 ... 20 mA with automatic zero adjustment:			$V_S = 19 \dots 32 V_{DC}$ $V_S = 24 \dots 32 V_{DC}$	
Option	2-wire:	4 ... 20 mA with automatic zero adjustment:			$V_S = 11 \dots 32 V_{DC}$ $V_S = 24 \dots 32 V_{DC}$	
Performance						
Accuracy	for $P_N \geq 6$ mbar: $\leq \pm 0.5\%$ FSO BFSL			for $P_N < 6$ mbar: $\leq \pm 1\%$ FSO BFSL		
Permissible load	voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$ current 2-wire: $R_{max} = [(V_S - V_{S,min}) / 0,02 \text{ A}] \Omega$			current 3-wire: 330 $\Omega$		
Influence effects	supply: 0.05 % FSO / 10 V			load: 0.05 % FSO / $\text{k}\Omega$		
Response time $T_{90}$	< 100 msec; adjustable by potentiometer in the range of 0 msec up to 5000 msec					
Turn on time	500 msec					
Long term stability	$\leq \pm 0.5\%$ FSO / year at reference conditions, for $P_N < 6$ mbar $\leq \pm 0.2\%$ FSO / year at reference conditions, for $P_N \geq 6$ mbar					
Measuring rate	12.5 Hz					
Contact (optional)						
	3-wire version			2-wire version		
Number, form	2 x relay-output (NO/NC)			2 x PNP-open-collector-contact		
switching current	max. 1 A			max. 125 mA resistant; short-circuit-proof		
switching voltage	max. 60 $V_{DC}$ ; max. 40 $V_{AC}$					
switching capacity	max. 60 W					
Accuracy of switching points	$\leq \pm 2\%$ FSO			$\leq \pm 2\%$ FSO		
Accuracy of repeatability	$\leq \pm 0.5\%$ FSO			$\leq \pm 0.5\%$ FSO		
Switching frequency	5 Hz			5 Hz		
Switching cycles	< 100 x 10 <sup>6</sup>			< 100 x 10 <sup>6</sup>		
Thermal effects / Permissible temperatures						
Thermal error (offset and span)	$\leq \pm 0.5\%$ FSO / 10 K (typ.) for $P_N < 6$ mbar			$\leq \pm 0.3\%$ FSO / 10 K (typ.) for $P_N \geq 6$ mbar		
in compensated range	0 ... 50 °C					
Permissible temperatures	medium: 0 ... 50°C		electronics / environment: 0 ... 50°C		storage: -10 ... 70°C	
Electrical protection						
Short-circuit protection	permanent					
Reverse polarity protection	no damage, but also no function					
Electromagnetic protection	EMC directive: 2014/30/EU			emission and immunity according to EN 61326		
Materials						
Pressure port	brass nickel plated					
Housing	ABS					
Sensor	ceramic, silicon, epoxy, RTV					
Media wetted parts	pressure port, PVC / silicone tube, sensor					
Display (optional)						
Performance	two-line LC-Display, visible range 32.5 x 22.5 mm; 5-digit 7-segment-main display, digit size 8 mm, range of indication: $\pm 9999$ ; 8-digit 14-segment-additional display, digit size 5 mm; 52-segment-bargraph; accuracy: 0.1% $\pm 1$ digit					
Functions	<ul style="list-style-type: none"> <li>- parameterisation of contacts</li> <li>- selection of units</li> <li>- selection of signal (linear, square root extraction)</li> <li>- cut-off-function (only with square root extraction)</li> <li>- min- / max-value</li> <li>- recalibration</li> <li>- autozeroing</li> <li>- factory setting</li> </ul>					

Miscellaneous		
Current consumption	2-wire: max. 22 mA (during automatic zero adjustment: +23 mA)	3-wire: max. 30 mA
Weight	approx. 200 g	
Ingress protection	IP 54	
Installation position	vertical <sup>1</sup>	
Operational life	100 million load cycles	


<sup>1</sup> The devices are calibrated in a vertical position with pressure port down. If this position is changed on installation there can be slight deviations in the zero point.

Mechanical connections (dimensions in mm)	
Standard	Ø 6.6 x 11 (for flex. tubes Ø 6)
Option	Ø 4.4 x 10 (for flex. tubes Ø 4)


Electrical connections (conductor cross-section)	
Without ferrule	1.5 mm <sup>2</sup>
With ferrule	1 mm <sup>2</sup>

Pin configuration		
Standard	cable gland M16x1.5	
Electrical connections	3-wire	2-wire
supply +	VS +	VS +
supply -	VS -	VS -
signal + (only for 3-wire)	Iout / Vout	-
contact 1	C1 / NO1 / NC1	S1
contact 2	C2 / NO2 / NC2	S2

### Wiring diagram

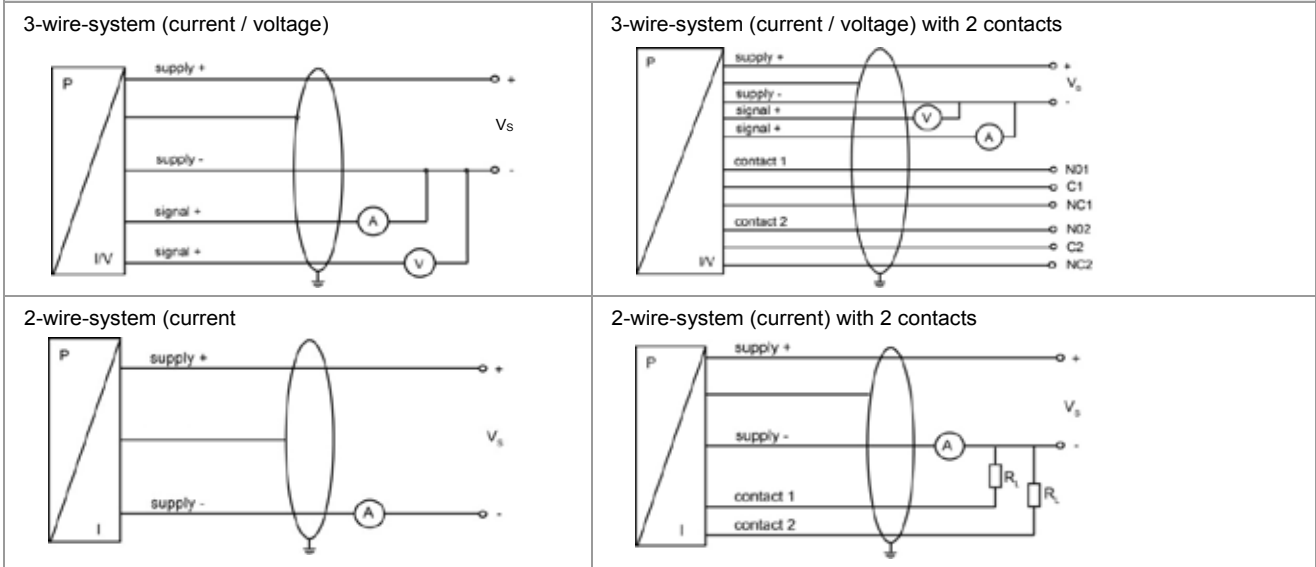

### Dimension (in mm)

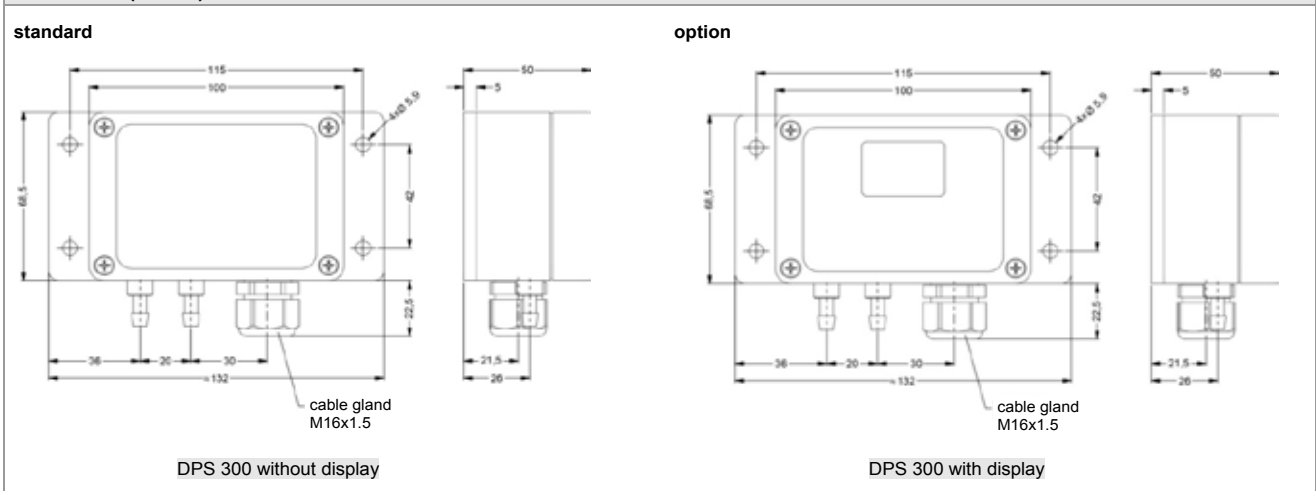

# DPS 300

## Ordering Code

### Ordering code DPS 300

DPS 300



		8 1 5		8 1 6		0 0 1 6		0 0 4 0		0 1 0 0		0 4 0 0		2 5 0 0		1 0 0 1		S 1 K 6		S 0 0 4		S 0 1 0		S 0 4 0		S 2 5 0		S 1 0 2		9 9 9 9	
<b>Pressure</b>																															
	differential pressure	8 1 5																													
	gauge pressure	8 1 6																												consult	
<b>Input [mbar]</b>																															
	1.6					0 0 1 6																									
	4.0					0 0 4 0																									
	10					0 1 0 0																									
	40					0 4 0 0																									
	250					2 5 0 0																									
	1000					1 0 0 1																									
	-1.6 ... 1.6					S 1 K 6																									
	-4 ... 4					S 0 0 4																									
	-10 ... 10					S 0 1 0																									
	-40 ... 40					S 0 4 0																									
	-250 ... 250					S 2 5 0																									
	-1000 ... 1000					S 1 0 2																									
	customer					9 9 9 9																								consult	
<b>Output</b>																															
	3-wire: 0 ... 10 V, 0 ... 20 mA <sup>1</sup>							3Z																							
	2-wire: 4 ... 20 mA							1																							
	customer							9																						consult	
<b>contact</b>																															
	without							0																							
	2 contacts <sup>2</sup>							B																							
<b>Accuracy</b>																															
	$P_N \geq 6$ mbar	0,5 % FSO BFSL						8																							
	$P_N < 6$ mbar	1,0 % FSO BFSL						G																							
<b>Display</b>																															
	without display							0																							
	LC display							C																							
	customer							9																						consult	
<b>Front foil</b>																															
	BD SENSORS							1																							
	neutral							N																							
	customer							9																						consult	
<b>Mechanical connection</b>																															
	Ø6.6 x 11 (for flex. tubes Ø6)									Y 0 0																					
	Ø4.4 x 10 (for flex. tubes Ø4)									Y 0 2																					
										9 9 9																				consult	
<b>Pressure port</b>																															
	brass nickel plated											M																			
	customer											9																		consult	
<b>Special version</b>																															
	standard													0 0 0																	
	automatic zeroing													6 0 0																	
	square-root extraction <sup>2</sup>													6 0 5																	
	customer													9 9 9																consult	

output switchable on 0 ... 5 V / 4 ... 20 mA  
only in combination with display





# DPS 200

## Differential Pressure Transmitter for Gas and Compressed Air

### Applications:

- ▶ for HVAC-applications

### Characteristics:

- ▶ piezoresistive silicon sensor
- ▶ differential pressure range 6 ... 1000 mbar

### Technical Data



Input pressure range													
Nominal pressure $P_N$ [mbar] (differential, gauge pressure)	6	10	16	25	40	60	100	160	250	400	600	1000	
max. static pressure [mbar]	200	345	345	345	345	345	345	1000	1000	3000	3000	3000	

Output signal / Supply	
Standard	3-wire: 0 ... 10 V <span style="float: right;"><math>V_S = 19 \dots 32 V_{DC}</math></span>
Option	2-wire: 4 ... 20 mA <span style="float: right;"><math>V_S = 11 \dots 32 V_{DC}</math></span> 3-wire: 4 ... 20 mA <span style="float: right;"><math>V_S = 19 \dots 32 V_{DC}</math></span>
Performance	
Accuracy	$\leq \pm 1\%$ FSO BFSL
Permissible load	current 2-wire: $R_{max} = [(V_S - V_{Smin}) / 0,02 A] \Omega$ current 3-wire: 330 $\Omega$ <span style="float: right;">voltage 3-wire: 10 k<math>\Omega</math></span>
Influence effects	supply: $\leq \pm 0,1\%$ FSO/10V <span style="float: right;">load: <math>\leq \pm 0,1\%</math> FSO/k<math>\Omega</math></span>
Response time (0 ... 100%)	2-wire: adjustable by potentiometer in the range of 500 msec up to 2.5 sec 3-wire: adjustable by potentiometer in the range of 50 msec up to 2.5 sec
Long term stability	$\leq \pm 0,5\%$ FSO / year at reference conditions
Measuring rate	2-wire: 8 Hz <span style="float: right;">3-wire: 1 kHz</span>
Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error (offset and span)	$\leq \pm 0,3\%$ FSO / 10 K (typ.)
in compensated range	0 ... 50 °C
Permissible temperatures	medium: 0 ... 50°C <span style="float: right;">electronics / environment: 0 ... 50°C</span> <span style="float: right;">storage: -10 ... 70°C</span>
Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic protection	emission and immunity according to EN 61326
Materials	
Pressure port	brass nickel plated
Housing	ABS
Sensor	ceramic, silicon, epoxy, RTV
Media wetted parts	pressure port, PVC / silicone tube, sensor

Miscellaneous	
Display (optional)	LC-Display, visible range 32.5 x 22.5 mm; 5-digit 7-segment-main display, digit size 8 mm, 8-digit 14-segment-additional display, digit size 5 mm; 52-segment-bargraph
Current consumption	2-wire: signal output current: max. 22 mA 3-wire: signal output current: max. 30 mA signal output voltage: 7.5 mA (20 mA short circuit) display: + 1 mA
Units	following units can be set at factory: [bar], [mbar], [PSI], [Inch Hg], [cm Hg], [mm Hg], [hPa], [kPa], [MPa], [mH <sub>2</sub> O], [Pa], [mmH <sub>2</sub> O]
Ingress protection	IP 54
Weight	approx. 165 g
Installation position	vertical <sup>1</sup>
Operational life	100 million load cycles


<sup>1</sup> The devices are calibrated in a vertical position with the pressure port down. If this position is changed on installation there can be slight deviations in the zero point.

#### Mechanical connections (dimensions in mm)


Standard	Ø 6.6 x 11 (for flex. tubes Ø 6)
Option	Ø 4.4 x 10 (for flex. tubes Ø 4)

#### Wiring diagram

2-wire-system (current)



3-wire-system (current / voltage)

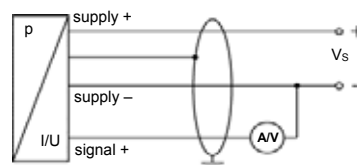


#### Pin configuration


Electrical connections	Terminals 2-wire-system	Terminals 3-wire-system
supply + supply - signal + (only for 3-wire)	2 / + 3 / - 1 (not connected)	2 / V <sub>S</sub> + 3 / V <sub>S</sub> - 1 / SIG

#### Dimensions (in mm)

standard:  
DPS 200 without display

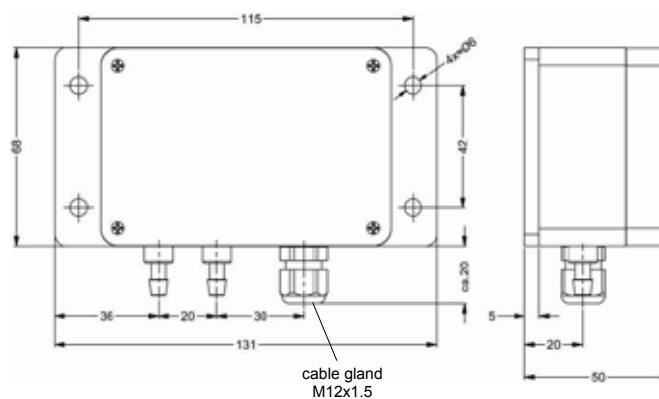

optional:  
DPS 200 with display

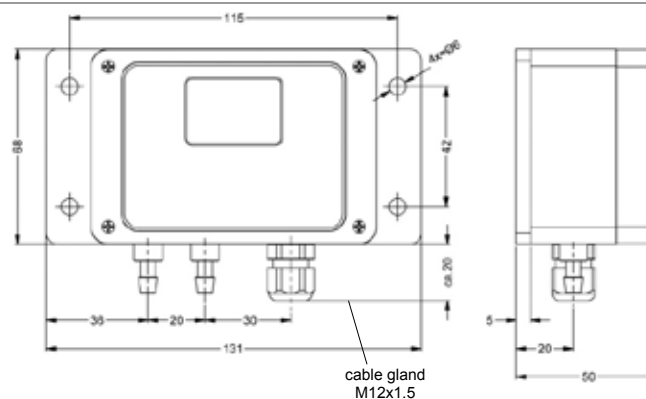

### Ordering code DPS 200

DPS 200



Pressure		8	1	0																
	differential pressure	8	1	0																
	gauge pressure	8	1	1																consult
Input [mbar]																				
	6				0	0	6	0												
	10				0	1	0	0												
	16				0	1	6	0												
	25				0	2	5	0												
	40				0	4	0	0												
	60				0	6	0	0												
	100				1	0	0	0												
	160				1	6	0	0												
	250				2	5	0	0												
	400				4	0	0	0												
	600				6	0	0	0												
	1000				1	0	0	1												
	customer				9	9	9	9												consult
Output																				
	0 ... 10 V / 3-wire							3												
	4 ... 20 mA / 2-wire							1												
	4 ... 20 mA / 3-wire							7												
	customer							9												consult
Accuracy																				
	1 % FSO BFSL								G											
Display																				
	without display								0											
	LC display								C											
	customer								9											consult
Front foil																				
	BD SENSORS								1											
	neutral								N											
	customer								9											consult
Mechanical connection																				
	Ø6.6 x 11 (for flex. tubes Ø6)									Y	0	0								
	Ø4.4 x 10 (for flex. tubes Ø4)									Y	0	2								
	customer									9	9	9								consult
Pressure port																				
	brass nickel plated														M					
	customer														9					consult
Special version																				
	standard															0	0	0		
	customer															9	9	9		consult





## COMPETENCE

Industrial pressure measurement technology from 0.1 mbar up to 8000 bar

- > pressure transmitters, electronic pressure switches or hydrostatic level probes
- > OEM or high-end products
- > standard products or customized solutions

BD|SENSORS has the right pressure measuring device at the right price.

## PRICE / PERFORMANCE

Pressure measurement at the highest level

The concentration on electronic pressure transmitter has led to extraordinary efficiency and economical pricing.

BD|SENSORS is certain to be one of the most economical suppliers on the world market, given equal technical and commercial conditions.

## RELIABILITY

Projectable delivery times and strict observance of deadlines

Short delivery times and firm deadlines, even for special designs, make BD|SENSORS a reliable partner for our customers.

BD|SENSORS reduces the level of your stock-keeping and increases your profitability.

## FLEXIBILITY

We have special solutions for your individual requirement.

We solve your problem in industrial pressure measurement quickly and economically, not only with large-scale production lines, but also for smaller requirements.

BD|SENSORS is especially flexible when technical support and quick assistance are required in service case as well as for rush orders.

## INDUSTRIES



plant and machine engineering



chemical and biochemical industry



energy industry



renewable energy



semiconductor industry /  
cleanroom technology



HVAC



hydraulics



refrigeration



calibration techniques



laboratory techniques



medical technology



food and beverage



vehicles and mobile hydraulics



oil and gas industry



pharmaceutical industry



marine / shipbuilding / offshore



heavy industry



environmental industry



packaging and paper industry

## MEDIA



sewage



aggressive media



colours



gases



fuels and oils



pasty and viscous media



oxygen



water

**DISTRIBUTION WORLDWIDE**

HEADQUARTER DER BD | SENSORS GROUP  
BD | SENSORS GmbH  
BD-Sensors-Straße 1  
95199 Thierstein  
GERMANY

Tel.: +49 9235 9811-0  
Fax: +49 9235 9811-11

[www.bdsensors.de](http://www.bdsensors.de)  
[info@bdsensors.de](mailto:info@bdsensors.de)

**DISTRIBUTION EASTERN EUROPE**

BD | SENSORS s.r.o.  
Hradištská 817  
68708 Buchlovice  
CZECH REPUBLIC

Tel.: +420 572 411-011  
Fax: +420 572 411-497

[www.bdsensors.cz](http://www.bdsensors.cz)  
[sale@bdsensors.cz](mailto:sale@bdsensors.cz)

**DISTRIBUTION RUSSIA**

BD | SENSORS Rus  
37a, Varshavskoe shosse  
117105 Moscow  
RUSSIA

Tel.: +420 572 411-011  
Fax: +420 572 411-497

[www.bdsensors.ru](http://www.bdsensors.ru)  
[sales@bdsensors.ru](mailto:sales@bdsensors.ru)

**DISTRIBUTION CHINA**

BD | SENSORS China  
Building B, 2nd floor,  
Building 10, No. 1188, Lianhang Road  
Pujiang Town, Minhang District, Shanghai  
CHINA

Tel.: 0086 / 21 / 51600190  
Fax: 0086 / 21 / 33600610

[www.bdsensors-china.com](http://www.bdsensors-china.com)  
[info@bdsensors-china.com](mailto:info@bdsensors-china.com)